

Product Parameters Product Name: 6W RGB+CCT LED Downlight

Model No.: FUT068-B

Input Voltage: 100-240V~ 50/60Hz

Rated Power: 6W

Working Temp.: -20~60°C

CRI: >80

PF: >0.5

Luminous Flux: 600LM

Light Efficiency: 85LM/W

Color Temp.: 2700K~6500K

Lifespan: 50000 hours

Beam Angle: 120°


RF: 2.4GHz

Control Distance: 30m Material: ALuminum


Ø118mm


Hole Size: Ø90~95mm

1PC/BOX G.W.: 0.244KGS

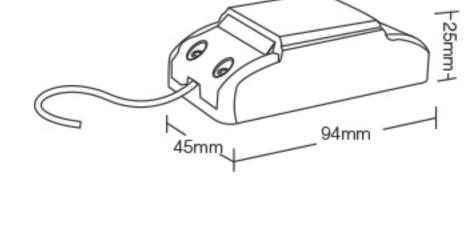





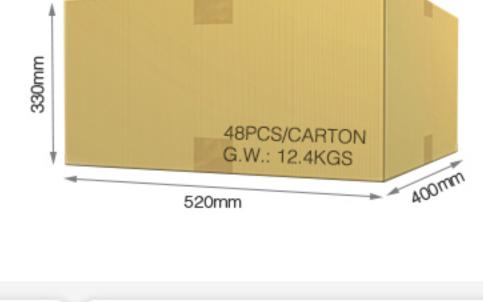



2.4GHz RF

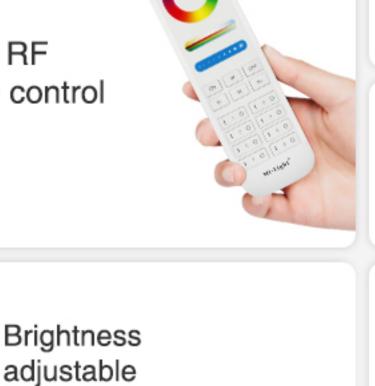

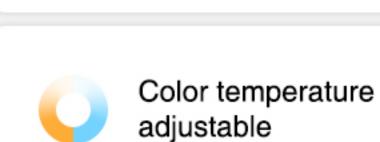

16 Millions of

colors to choose



adjustable

Saturation

Compatible

Remote






FUT088







B4 / B4-B Τ4

B3 / B3-B T3





S2-W / S2-B

within 30m, the remote control distance can be limitless.

Signal transmitting

One LED downlight can transmit the signals from

within 30m, as long as there is a LED downlight

the remote control to another LED downlight

Signal transmitting & Modes synchronization LED Downlight

and within 30m distance.


Distance 30m


Signal transmitting & Modes synchronization


Different LED downlight can work synchronously

when they are started at different times, controlled


by the same remote, under same dynamic mode

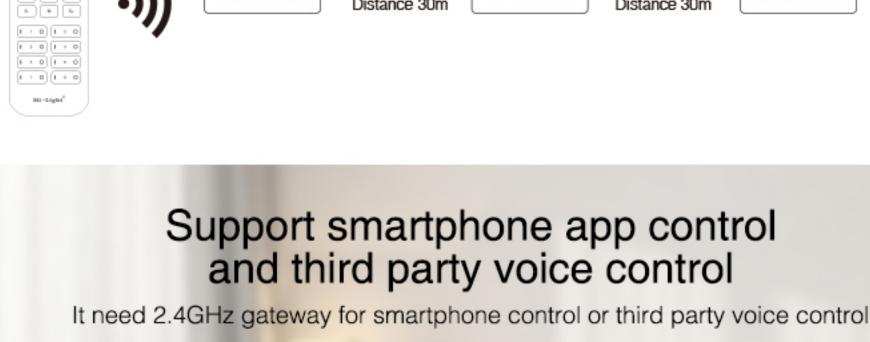









LED Downlight

LED Downlight



